



# Flex Bolt Seal

BOLT SEAL

The Flex Bolt Seal is a ISO 17712:2013 high security bolt seal which consists of a flexible bolt, with non-preformed cable, and is overmolded with ABS plastic. The Flex Bolt seals are designed for ISO containers, retail shipments, and high value domestic and export cargo shipments.



## APPLICATIONS

- Truck & Trailer Doors
- Intermodal Containers
- Box Car Doors
- Retail Shipments

## FEATURES

- ISO 17712: 2013 and C-TPAT compliant
- Flexible bolt removed with cable cutters
- Overmolded in ABS Plastic to prevent tampering
- Both parts are numbered to prevent fraud by replacement of either bolt or body
- Bolt and lock come attached in a unique package for ease of use and accurate tracking of numbers
- Interlocking joint to protect against tampering

## MATERIAL

- Body: ABS plastic overmold
- Bolt: Galvanized Aircraft Cable

## DIMENSIONS

- Diameter: 3/16" galvanized aircraft cable
- Length: 4.8" (122mm)

## STRENGTH CHARACTERISTICS

- Average pull-apart force is 3,480 lbs (1.15 kN)

## MARKING/PRINTING

- Laser marking and barcoding available



# Flex Bolt Seal



## STANDARD COLORS

White / Yellow / Lt. Blue




## PACKAGING

200 seals per box

Gross Weight: 35 lbs per box (16 kg)

Box Dimensions: 14.4" x 9" x 9" (36.5cm x 23cm x 23cm)

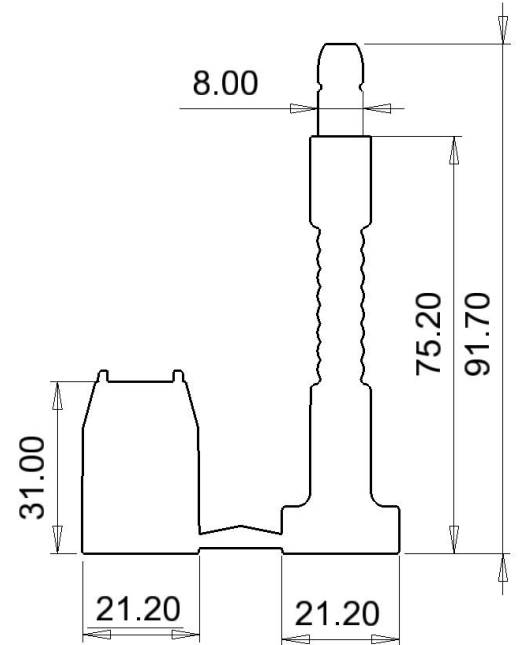

ANGOLA, IN • ATLANTA, GA • TALLAPOOSA, GA • MARTLEY, UK • MONTERREY, MX • SUZHOU, CN 260.624.4800 •

800.344.4772 • [www.tydenbrooks.com](http://www.tydenbrooks.com) • [info@tydenbrooks.com](mailto:info@tydenbrooks.com)

